

DC OUTPUT (max 1500W) : 0 - 100 Amps
0 - 1500 Volts



Presentation :

- Specifications:
 - 19 inch rack or cabinet
 - Height : 2U
 - Depth: 275 mm
- Minimum volume and weight for maximum capacity
- Switched mode technology
- Voltage and current controlled by PWM (Pulse Width Modulation)
- On request : programmable voltage/current: 0-10 V, isolated to 1500 Vrms
- Over-voltage protection (OVP) / Over-temperature protection (OTP)
- Touch interface

Power : MX 1500W Weight : 7 Kg	
Volts	Amps
0 – 15	0 - 100
0 – 30	0 - 50
0 – 35	0 - 40
0 – 50	0 - 30
0 – 75	0 - 20
0 – 100	0 - 15
0 – 150	0 - 10
0 – 180	0 - 8
0 – 250	0 - 6
0 – 350	0 - 4
0 - 750	0 - 2
0 - 1500	0 – 1

Stabilized laboratory power-supply TACTILE MICROLAB DC MX 1500W

Descriptions :

- . Polycarbonate front panel
- . Two modes of operation: constant current (CC) and constant voltage (CV) indicated by two LEDs
- . Power output activated by pressing 'OUT'
- . Power input by standardised pluggable connector
- . Power outputs on insulated terminals or screw terminal block

Power : MX 1500W
Weight : 7 Kg

AC Input

Voltage	230 Vac Mono + 10% -15%
Frequency	47 / 63 Hz
Power factor	> 0,95

DC Output

Power	1500 W
Voltage	0 to 1500 V
Current	0 to 100 A
Mode of operation	CV/CC
Residual ripple	< 0,5% of the normal gauge
Accuracy (voltage and current)	< 0,2% of the normal gauge
Stability	< 0,2% of the normal gauge
Linearity	< 0,2% of the normal gauge
Distortion	< 0,5%

Environment

Temperature	0 to +40°C (55°C derating)
Relative Humidity	85% without condensation
Cooling	Controlled air cooling
Dielectric Rigidity	1500 Vrms

Customisation :

Digital control:

- 2-wire RS 485 / Ethernet / Wifi
- Profibus DP
- Standard : Schneider/ Siemens/Wago/Phoenix...

Analog control:

- U and I Inputs/Outputs
- 0-10V or 4-20 mA isolated 1500 Vrms


Polarity Inverter

A-h T.J.P Counter

Tension or Intensity Ramp

Timer

15-pin D-Sub connector for remote programming

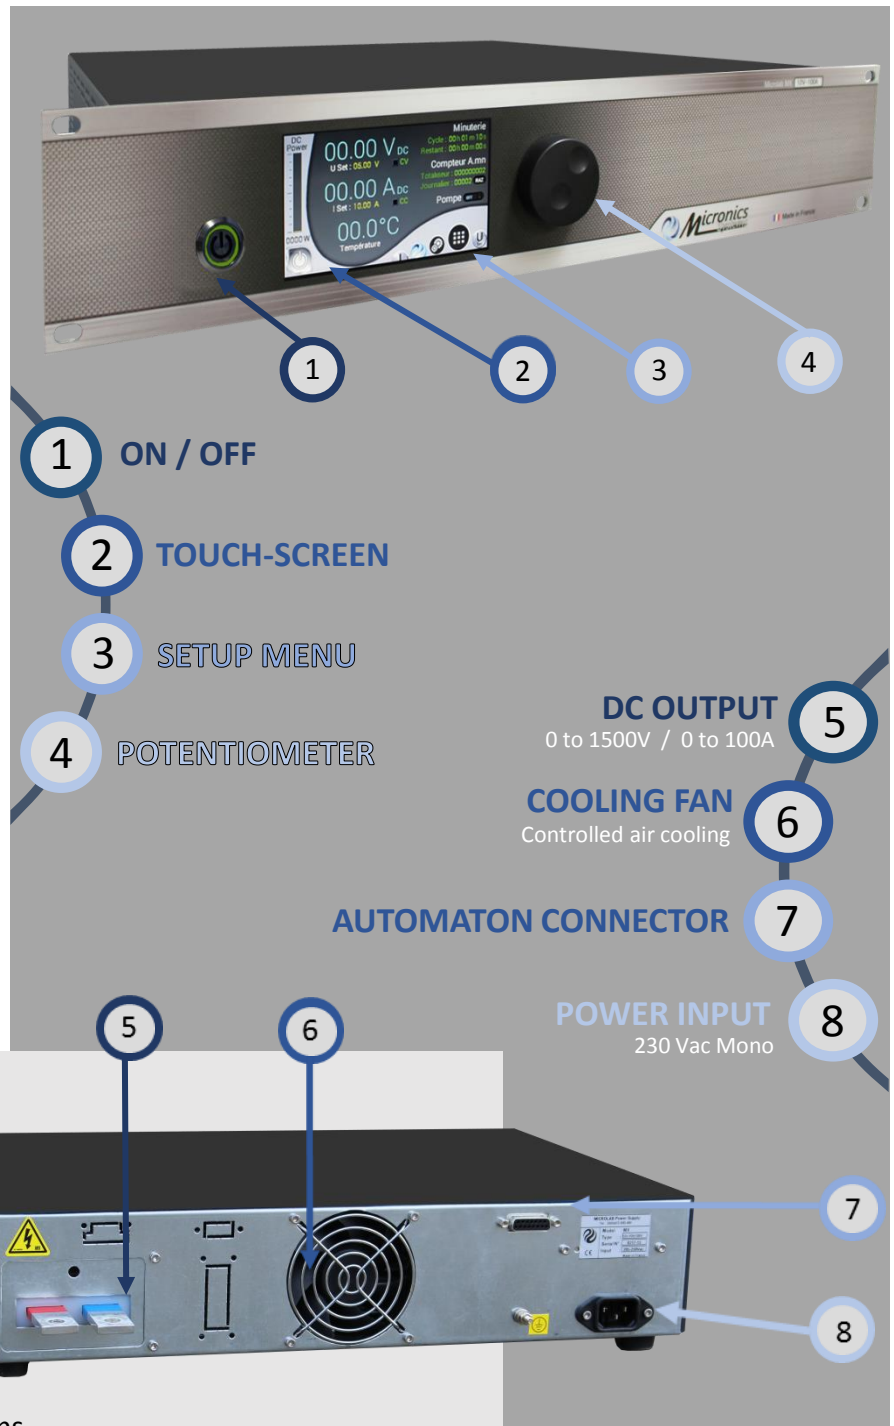

Non-binding document, may be amended without notice.
Ref: 140217 / Tactile MX 1500W